

Balancing valves, stainless steel, reduced bore


PN 25, flange / flange, DN 65-150, reduced bore

Body	DN 65-150 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-150 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-150 PTFE+GF
Stem	DN 65-150 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-150 FPM/NBR
Measuring block	DN 65-150 Type Oras, stainless steel, X2CrNiMo17-12-2 (1.4404) / NBR
Operation	DN 65-150 With zinc-plated steel handle
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

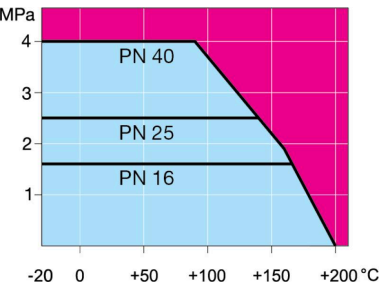

Not for steam

DN 65-150

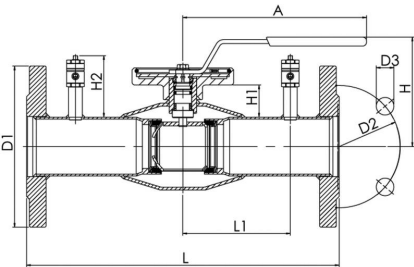

DN	PN	Product no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	25	266570V	280	185.0	145.0	18.0	148	58	82	310	110	10.8
80	25	266571V	280	200.0	160.0	18.0	160	64	82	310	110	13.5
100	25	266572V	280	235.0	190.0	22.0	173	52	82	350	122.5	19.5
125	25	266573V	400	270.0	220.0	26.0	221	68	82	360	137.5	30.8
150	25	266574V	600	300.0	250.0	26.0	240	74	82	390	150	36.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.

Balancing valves, stainless steel, reduced bore

PN 25, flange / flange, DN 200-250, reduced bore


Body	DN 200-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 200-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 200-250 PTFE+GF
Stem	DN 200-250 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 200-250 FPM/NBR
Measuring block	DN 200-250 Type Oras, stainless steel, X2CrNiMo17-12-2 (1.4404) / NBR
Operation	DN 200-250 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40



Operation conditions


-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

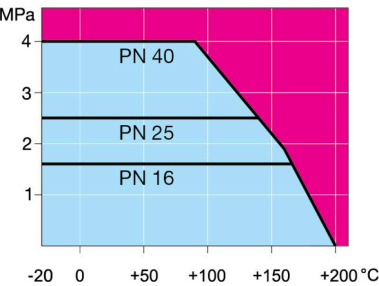


Not for steam

DN 200-300



DN 200-300



DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	25	266576V	268	244	69	360.0	310.0	26.0	250.0	293	72	101	101	425	195	66.0
250	25	266577V	301	294	97	425.0	370.0	30.0	300.0	345	88	107	107	550	256	113.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.